



SINOSTAR

中辰股份

股票代码:300933

35kV

90 ,

250 ,

5

70 ,

160 ,

150 ,

5

1

2

3

4

5

1

6

a -5 +40

b 95% +35);

c 5mm3/min

d

e

f 250mg/m²*24h

g 300mg/m²*24h

6

7


1

2

3

T


4



1



2

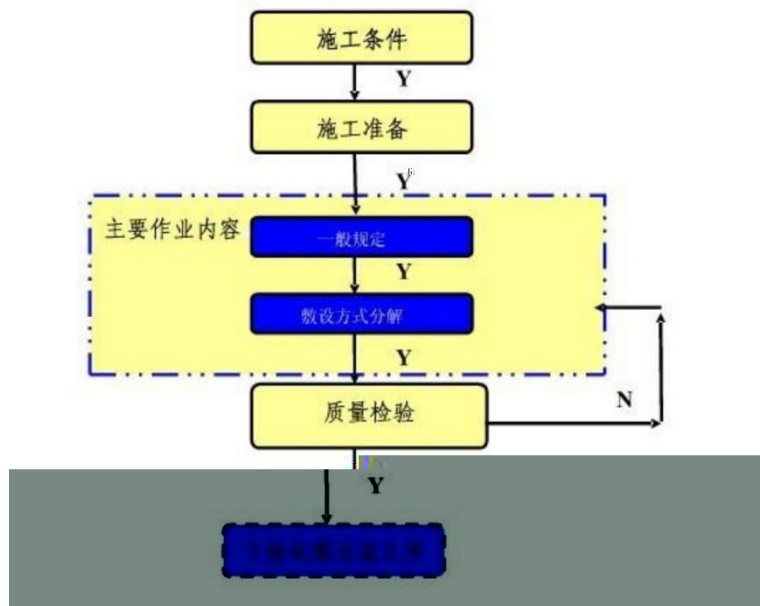

3

1

2

3)


4)

5)

6)

4

1)

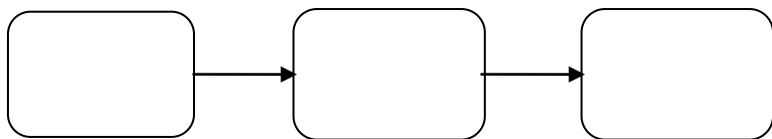

2

3

-20

0

0

4

72

25

24-36

5-10

+5


1

0

5)

6)

7)

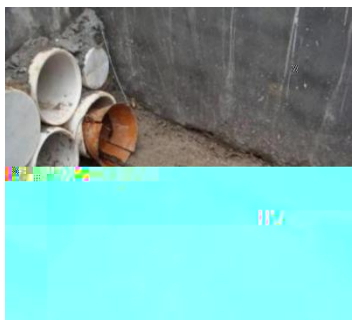

8)

10%

1.5

100mm

9)

5mm

5mm

150-200mm

250mm

10mm

5mm

10mm

10)


40%

5


1)



2)

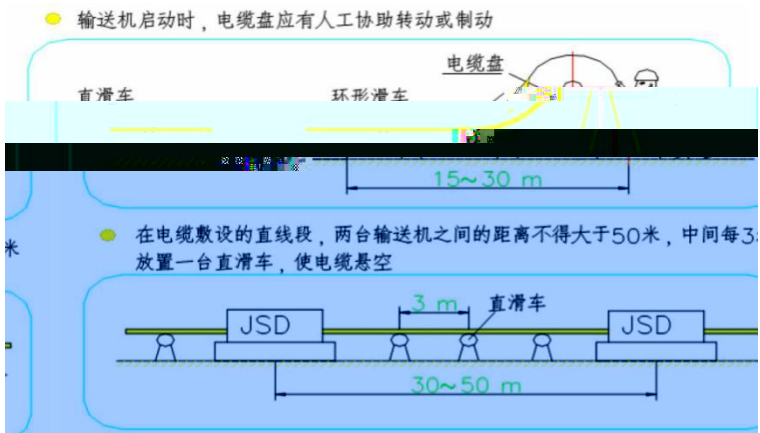


3)

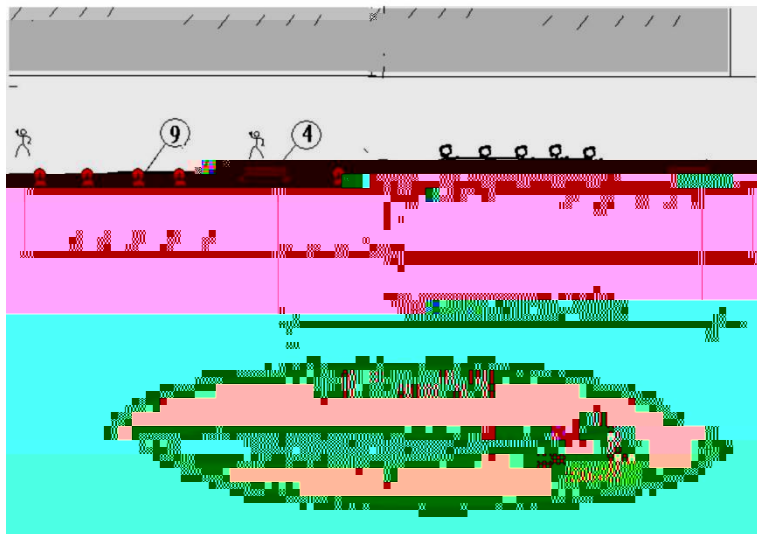


4)


● 电缆转弯时，输送机应布置在直线段部位




● 电缆上坡时，输送机应按下图所示放置

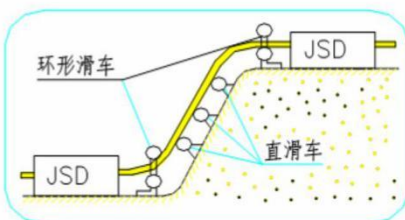

5)

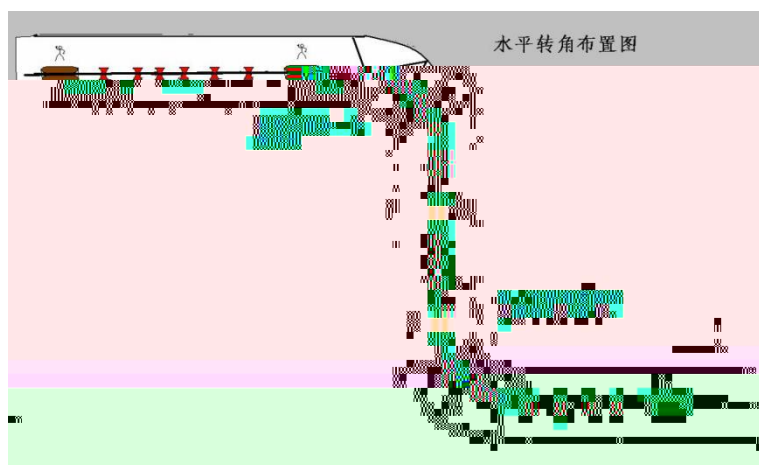

6)

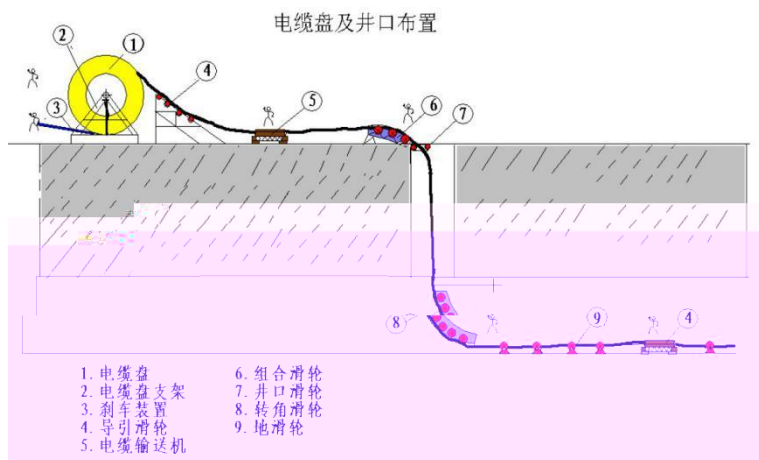

7)

6

1)

2)

3)

4)

5)

7

1)

15m/min

2)

3)

4)

5)

6)

7)

8)

●

20

15

15

12

●

12

6

●1kV

25mm

4

25mm

6

●10kV 35kV

20

15

8

1)

2)

3)

4)

5)

6)

7)


8)

9)

25mm

2000

1)

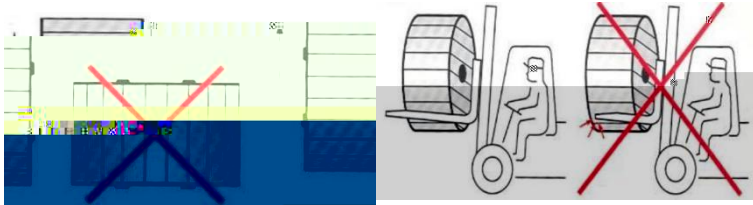

2)

3)

4)

5)

6)

7)

8)

9)